

# Antenna Installation Guide



## Cellular Cradle Plus™

### Contents:

Inside this Package . . . . .	1
Multiple Mounting Options . . . . .	1
Air Vent Bracket . . . . .	1
Adhesive Bracket . . . . .	1
Gooseneck Suction Mount . . . . .	2
Adhesive/Screw Swivel Bracket . . . . .	2
Attaching the Cradle . . . . .	Back Cover
Adjusting the Cradle's Arms . . . . .	Back Cover
Guarantee and Warranty . . . . .	Back Cover


**Note:** This manual contains important safety and operating information. Please read and follow the instructions in this manual. Failure to do so could be hazardous and result in damage to your Signal Booster.

**Disclaimer:** The information provided by Wilson Electronics, Inc. is believed to be complete and accurate. However, no responsibility is assumed by Wilson Electronics, Inc. for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use. Copyright © 2011 Wilson Electronics, Inc. All rights reserved.

Appearance of device and accessories may vary.

## Installation Instructions for the Following Wilson Electronics Antenna Cellular Cradle Plus™

### Inside this Package

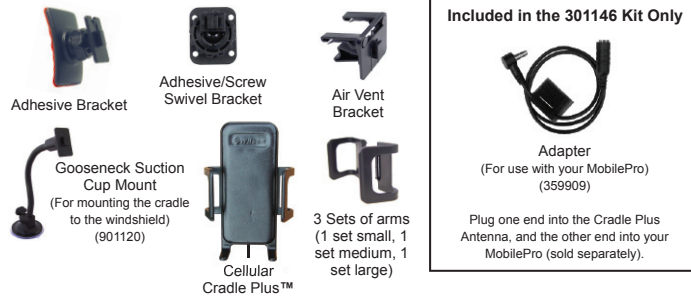

Appearance of device and accessories may vary.

### Cellular Cradle Plus™

Wilson Electronics' Cellular Cradle Plus offers a built-in cell phone signal antenna/coupler. Used in conjunction with one of Wilson Electronics Cellular Signal Boosters, the Cradle Plus can improve your cellular signal more than 20 times and help you stay connected in places you never could before!

### Multiple Mounting Options

Multiple mounting options allow for a custom installation in virtually any vehicle. Before mounting, determine the desired location of the cradle in your vehicle. Hold the cradle in the intended position and be sure it does not obstruct your view or block access to any controls or gauges necessary for safe driving.

#### Air Vent Bracket

1. Slide the bracket clips into the chosen vent location until they snap into place. If necessary, use a thin-bladed screwdriver to gently pry the clips apart as they slide into the vent.
2. Position the moveable arm at the base of the bracket to achieve the desired angle and to provide additional stability for the bracket.
3. See "Attaching the Cradle" on the back page.



#### Adhesive Bracket

1. Clean the area where the bracket is to be mounted with an alcohol wipe (included). Allow to dry.
2. Peel the backing to expose the adhesive and press the bracket onto the desired location in the vehicle. **Note:** Be sure the bracket is positioned vertically, not horizontally.



3. Allow the adhesive to cure for 24 hours before you attach the cradle.
4. See "Attaching Cradle" on the back page. **Note:** Once the cradle is attached, you can adjust the angle of the adhesive bracket by applying gentle pressure to the top or bottom of the cradle.

### Gooseneck Suction Mount

1. Clean the area of the windshield in the location you would like to attach the suction cup with an alcohol wipe (included). Allow to dry.
2. Press the suction cup at the base of the mount onto the windshield with even pressure. Depress the lever above the suction cup to pump the remaining air out of the area and to achieve a strong suction mount.
3. Bend the gooseneck to the location where you would like to attach the cradle. For best performance, adjust the gooseneck so that the cradle is allowed to rest on the dashboard.
4. See "Attaching the Cradle" on the back page.



**Note:** State law prohibits drivers in some states from using suction mounts on their windshields when operating motor vehicles. In such cases, other Wilson Electronics dashboard or console mounting options should be used. Wilson Electronics does not take any responsibility for any fines, penalties, or damages that may be incurred as a result of disregarding this notice.

### Adhesive/Screw Swivel Bracket

For best mounting results and long-term performance, we suggest that you choose a flat, smooth surface like the console area of your vehicle between the two front seats. If this is not available in your vehicle, you may mount the cradle on the front of the dashboard.



If mounting the cradle on a sloped area of the dashboard in your vehicle, please note that gravity may affect the adhesive over time. Use the screw mount for a more permanent attachment.

1. Clean the area where the bracket is to be mounted with an alcohol wipe (included). Allow to dry.
2. **For an adhesive mount,** peel the backing to expose the adhesive and press the bracket onto the desired location in the vehicle. **Note:** The swivel feature allows the bracket to be positioned vertically or horizontally. Allow the adhesive to cure for 24 hours before you attach the cradle. **For a screw mount,** use an ice pick or an awl to punch through the adhesive and expose the four screw holes in the bracket. You must provide the screws of an appropriate size for your particular application. Using the bracket as a template, mark the locations for the screws, drill holes, attach the bracket with adhesive, and tighten all screws.
3. See "Attaching the Cradle" on the back page. **Note:** Once the cradle is attached, you can loosen the knurled wheel and swivel the hook to the desired angle, then re-tighten the wheel.

## Attaching the Cradle

Once you have installed your selected mount in the desired location, attach the cradle by aligning the rectangular hole on its back with the hook on the mount. Grasping the sides of the cradle, slide it downward approximately 1/4 inch into place.


## Adjusting the Cradle's Arms

Included with your Cradle are various sized arms, which will provide you with multiple options to customize the Cradle to fit your phone.



### 1. Change arms

Gently grab the arm and lift upward until the arm slides free from the Cradle.



### 2. Reposition arms

Position the arm above a different slot on the Cradle (indicated by the arrows in the drawing). Gently slide the arm down until the arm is firmly in place.

**NOTE:** The cell phone must be placed in the Cradle to work properly. Use a Bluetooth or wired hands free device.

### 30-Day Money-Back Guarantee

All Wilson Electronics products are protected by Wilson Electronics 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

### 1-Year Warranty

Wilson Electronics Antennas are warranted for one (1) year against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Antennas may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by Wilson Electronics. Wilson Electronics shall, at its option, either repair or replace the product. Wilson Electronics will pay for delivery of the repaired or replaced product back to the original consumer if located within the continental U.S.

This warranty does not apply to any antennas determined by Wilson Electronics to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

RMA numbers may be obtained by phoning Technical Support at 866-294-1660.



3301 East Deseret Drive, St. George, UT 84790

For additional Technical Support visit [www.WilsonElectronics.com](http://www.WilsonElectronics.com)

or email: [tech@wilsonelectronics.com](mailto:tech@wilsonelectronics.com)

Phone: 866-294-1660 Local: 435-673-5021 Fax: 435-656-2432

[www.twitter.com/WilsonCellular](http://www.twitter.com/WilsonCellular) [www.facebook.com/WilsonCellular](http://www.facebook.com/WilsonCellular)